
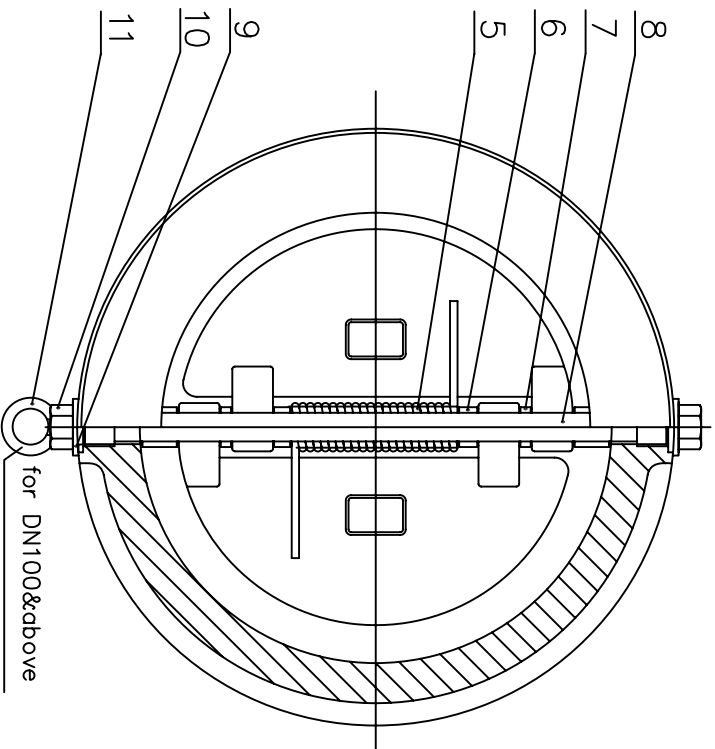


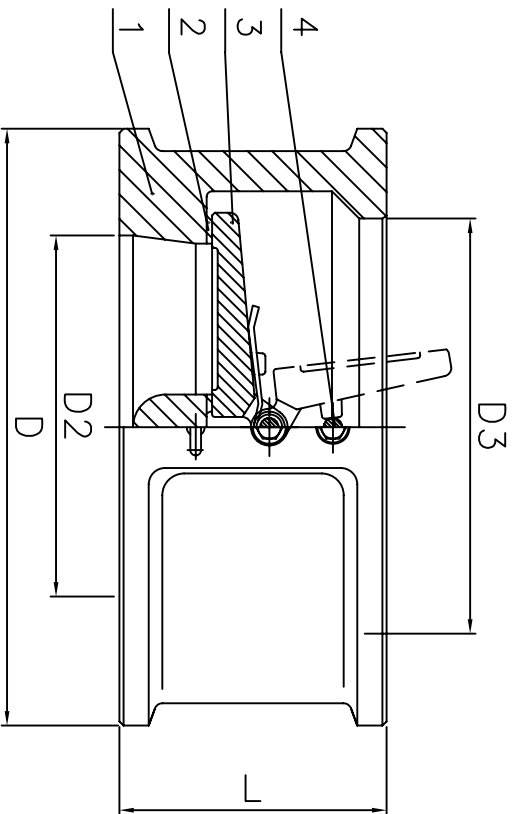

DIMENSIONS(mm)

PN	DN	D	D1	D2	L
	50	108	51	58	60
	65	128	65	73	67
	80	142	80	88	73
	100	168	102	108	73
40	125	194	127	132	86
	150	224	152	160	98
	200	291	203	210	127
	250	353	254	266	146

BILL OF MATERIALS		
NO	Part Name	Material
1	Body	A216 WCB
2	Seat	13Cr
3	Disc	A216 WCB+13Cr
4	Stop Pin	A182 F6a
5	Spring	Inconel X-750
6	Bearing Washer	A182 F6a
7	Bearing Washer	A182 F6a
8	Hinge Pin	A182 F6a
9	Gasket	SS304
10	Position Plug	A182 F6a
11	Eyebolt	Carbon Steel

Marking System	MSS-SP-25	Shell Test Pressure	6.0	MPa
Wafer Ends	Suit EN1092-1 B1 PN40	High Pressure Seal Test	4.4	
Face To Face	API 594	Backseat Test Pressure	-	
Design	API 594	Air Test Pressure	-	
Inspection&Test	EN12266-1/2	Applicable Temperature	-29~425°C	
P-T Rating	EN1092-1	Applicable Medium	Water,steam,oil,etc	
		Pmax: 40 bar	Tmax:425°C	Tmin: -29°C

Data subject to alteration due to continuous improvement.
Sujeto a cambios debido a la mejora continua de nuestra producción.



DUAL PLATE CHECK VALVE
PN40 DN50~DN250 WAFER
A216 WCB

Customer/Cliente	-	Project/Proyecto	-	Description/Descripción	Approved/Aprobado JG Drawing N°/Plano N° DPA00W00400
Your Ref./Su Ref.	-	Our Ref./Nuestra Ref.	-		
Date/Fecha	Rev. 1	Rev. 2	Rev. 3		
Name/Nombre					
				Drawn/Dibujado AC Checked/Comprob. DT	
				Date/Fecha 2019/3/6	